


SMART CARD



SMART CARD INFORMATION


SMART CARD

- ▀ Sliding or landing contact technology
- ▀ Blade or sealed switch option

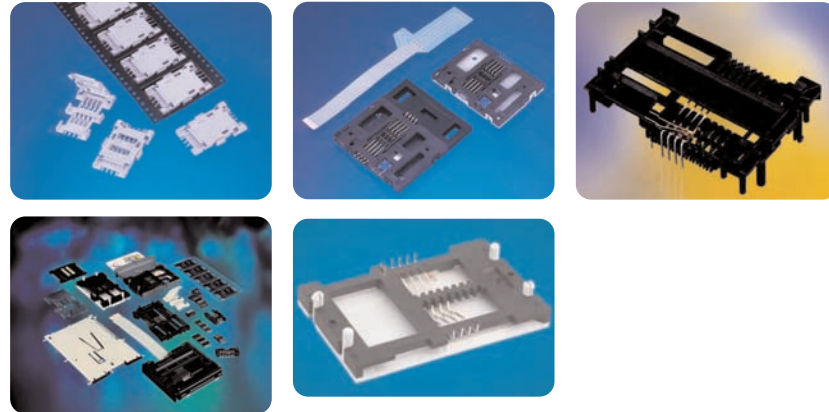

SMART CARD READER

- ▀ Smart Card Reader series
- ▀ Smart plus B series

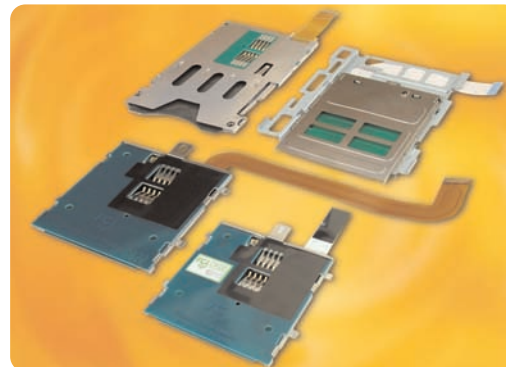



- FCI offers a full Smart Card portfolio. Product features include sliding or landing contact technology, TMT, SMT, or Flex mounted option. 6, 8 or 16 data contacts are available with either blade or sealed switches. SIM, SAM or full size card connectors are all available.

Product	Number of Cycles	Card Size		Soldering		Contact Technology		Switch Type	
		Full	SIM	TMT	SMT	Sliding	Landing	Blade	Sealed
E Series	200K	X		X+Flex	X		X		X
L04 Series	100K	X		X		X		X	
L04 Series Low Cost	100K	X		X		X		X	
L26 Series	10K - 100K	X		X+Flex	X	X		X	
L26 Series Low Cost	2.5K	X		X		X		X	
Z Series	10K - 100K	X		Panel		X		X	
P Series	100K	X			X	X		X	
L Series	100K	X		X		X		X	X
C Series	100K	X		X		X			
S Series	10K	X	X		X	X		X	

- Smart Card Reader with customized FPC/FFC offer flexibility to solder onto the appropriate position of a PCB. The very low profile provides superior space savings, especially for Notebook PC application.

Part Number	Termination	Pin	Thickness	Push-Pull Cycles
10010556-0**LF	Customized FPC/FFC	8	3 or 3.6mm	Without push-push
10026297-00*LF	Customized FPC	8	3.8mm	10K
55640-2*20*LF/-20211LF	Customized FPC	8	3.7mm	10K/25K