


RIB-CAGE™

High Density, .050" x .050" Board-to-Board Connector System

DESCRIPTION

Rib-Cage™ connectors optimize reliability in demanding applications.

Rib-Cage™ is a versatile family of two-piece, two-row pin-and-socket connectors for right angle and mezzanine connections between printed circuit boards (PCB) or flexible printed circuits (FPC).

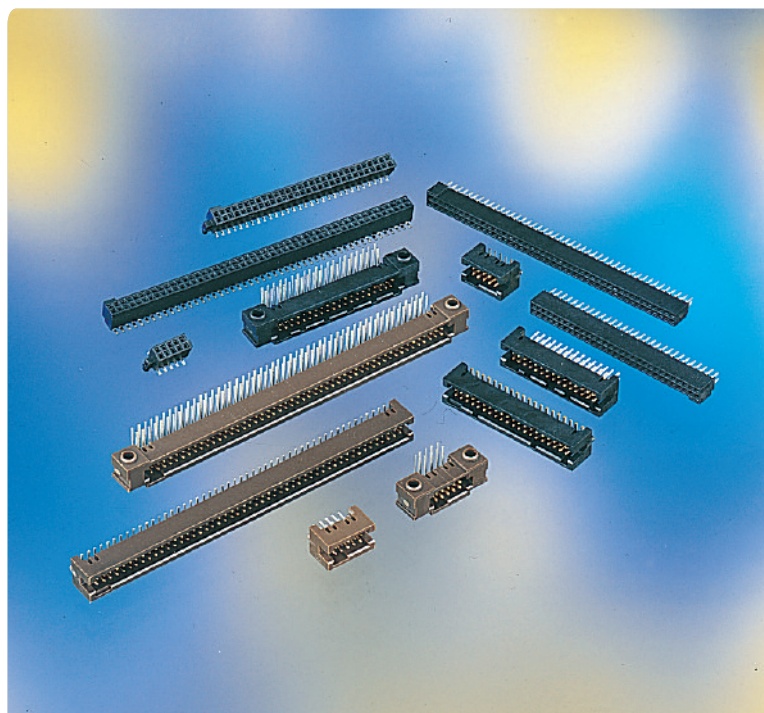


FEATURES & BENEFITS

- Exclusive Rib-Cage™ multi-point, gold plated receptacle contacts provide optimal reliability in high vibration and shock-prone applications
- High density 1.27mm (.050 in.) x 1.27mm (.050 in.) double row contact grid occupies only 20% of the volume of comparable .100 in. pitch systems
- Multiple stack height options offer flexibility for mezzanine connection designs (see back page)
- Polarization prevents mis-mating
- Multiple PCB positioning and PCB attachment options suit customer assembly requirements
- Available sizes: 10 through 100 total positions
- Lead-free, RoHS compatible plating satisfies environmental regulations

TARGET MARKETS / APPLICATIONS

- Shock resistant and vibration-prone electronic applications
- Handheld test and diagnostic equipment
- Electronic sub-assemblies used in conjunction with fans, motors and mechanical devices

VERTICAL WITH SURFACE MOUNT ATTACHMENT



Base number specifies surface-mount vertical shrouded header configuration

□ □ □ □ □ - 1 X X L F



Lead-Free indicator

Dash number specifies contact finish (1 = 0.76 µm (30 µin.) gold or GXT) and number of positions per row (5 through 50 in increments of 5)


Base Part Number

Optional Feature	Connector Height = DIM. P			
	mm	in.	mm	in.
Plain	87849	0.226	93221	
Locators	87409		90098	


Note 1 - Refer to composite drawing 95781 for availability of tape packaging.
 Note 2 - Locators are the same as those indicated in the SMT receptacle section.

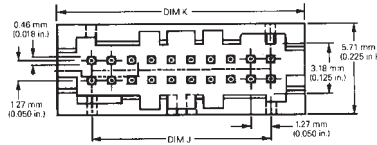

Dash Number	Size	L		J		K	
		mm	in.	mm	in.	mm	in.
105	2 x 5	8.13	0.320	5.08	0.200	9.45	0.372
110	2 x 10	14.48	0.570	11.43	0.450	15.80	0.622
115	2 x 15	20.83	0.820	17.78	0.700	22.15	0.872
120	2 x 20	27.18	1.070	24.13	0.950	28.50	1.122
125	2 x 25	33.53	1.320	30.48	1.200	34.85	1.372
130	2 x 30	39.88	1.570	36.83	1.450	41.20	1.622
135	2 x 35	46.23	1.820	43.18	1.700	47.55	1.872
140	2 x 40	52.58	2.070	49.53	1.950	53.90	2.122
145	2 x 45	58.93	2.320	55.88	2.200	60.25	2.372
150	2 x 50	65.28	2.570	62.23	2.450	66.60	2.622

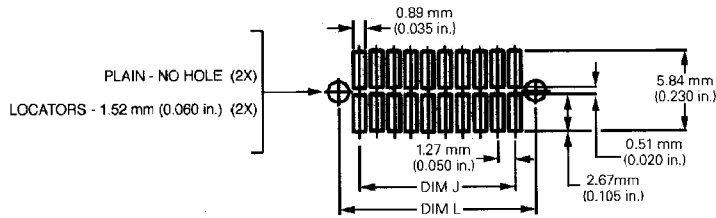

RIGHT ANGLE WITH THROUGH HOLE ATTACHMENT




Base number specifies Through-hole, right angle shrouded header configuration





8 7 4 0 2 - 1 X X L F

Lead-Free indicator


Dash number specifies contact finish (1 = 0.76 µm (30 µin.) gold or GXT) and number of positions per row (5 through 50 in increments of 5)

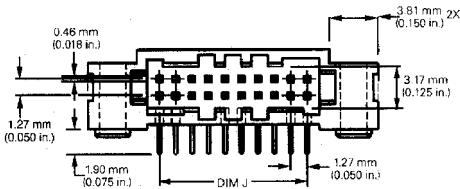

Dash Number	Size	G		J		L	
		mm	in.	mm	in.	mm	in.
105	2 x 5	6.13	0.635	5.08	0.200	12.35	0.485
110	2 x 10	22.48	0.885	11.43	0.450	18.67	0.735
115	2 x 15	28.83	1.135	17.78	0.700	25.02	0.985
135	2 x 35	54.23	2.135	43.18	1.700	50.42	1.985
140	2 x 40	60.58	2.385	49.53	1.950	56.77	2.235
145	2 x 45	66.93	2.635	55.88	2.200	63.12	2.485
150	2 x 50	73.28	2.885	62.23	2.450	69.47	2.735

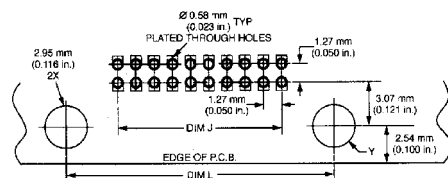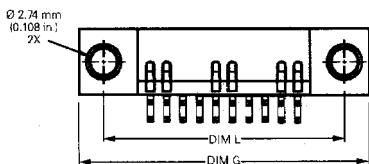

VERTICAL WITH SURFACE MOUNT ATTACHMENT



Base number specifies surface-mount vertical receptacle configuration

□ □ □ □ □ - 6 X X L F


Lead-Free indicator

Dash number specifies contact finish (6 = 0.76 μm (30 μin.) gold or GXT) and number of positions per row (5 through 50 in increments of 5)


Base Part Number

Optional Features	Non-Polarized	Polarized
Plain	87021	87022
Locators	87023	87024


Note 1 - Refer to product drawing for availability of tape and reel packaging.

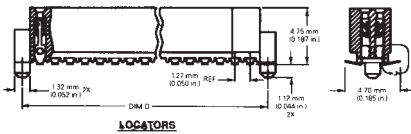

LOCATORS



PLAIN

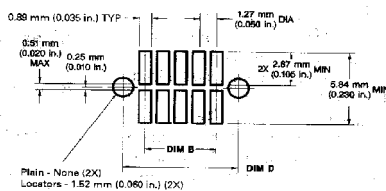


Plain - None (2X)
Locators - 1.52 mm (0.060 in.) (2X)

Dash Number	Size	A		B		C		D	
		mm	in.	mm	in.	mm	in.	mm	in.
605	2 x 5	6.756	0.266	5.080	0.200	9.398	0.370	8.128	0.320
610	2 x 10	13.106	0.516	11.430	0.450	15.748	0.620	14.478	0.570
615	2 x 15	19.456	0.766	17.780	0.700	22.098	0.870	20.828	0.820
620	2 x 20	25.806	1.016	24.130	0.950	28.448	1.120	27.178	1.070
625	2 x 25	32.156	1.266	30.480	1.200	34.798	1.370	33.528	1.320
630	2 x 30	38.506	1.516	36.830	1.450	41.148	1.620	39.878	1.570
635	2 x 35	44.856	1.766	43.180	1.700	47.498	1.870	46.228	1.820
640	2 x 40	51.206	2.016	49.530	1.950	53.848	2.120	52.578	2.070
645	2 x 45	57.556	2.266	55.880	2.200	60.198	2.370	58.928	2.320
650	2 x 50	63.906	2.516	62.230	2.450	66.548	2.620	65.278	2.570


STACK HEIGHT GUIDANCE

Surface-Mount Header 5.74 mm (0.226 in.)



SURFACE-MOUNT RECEPTACLE TO 6.42 mm (0.253 in.) TALL SURFACE-MOUNT HEADER

Surface-Mount Header 7.57 mm (0.298 in.)



SURFACE-MOUNT RECEPTACLE TO 8.25 mm (0.325 in.) TALL SURFACE-MOUNT HEADER



MATERIALS

- Housings: Glass-filled thermoplastic, UL 94 V-O, Black; Temperature Range: -55C to +130C
- Contact Base Metal, PCB Receptacles: Beryllium Copper
- Contact Base Metal, PCB Pin Headers: Phosphor Bronze
- Contact Plating: 30u (0.76um) Gold/GXT over Nickel in Contact area; 100u (2.54um) lead-free pure tin over Nickel on solder tails

ELECTRICAL PERFORMANCE

- Contact resistance (LLCR): 20 mΩ max initial; 25 mΩ max after environmental test
- Current Rating: 1.0 amp DC per contact with all contacts energized (30 deg C Temp. Rise)
- Insulation Resistance: 50,000 MΩ min initial
- Withstanding Voltage: 800 VAC, RMS at 60 Hz
- Capacitance: 1.0 pf max. between pairs of adjacent or opposing contacts, un-mated connector

MECHANICAL PERFORMANCE

- Mating force: 157g (5.5oz) max per contact
- Unmating force: 43g (1.5oz.) min per contact
- Contact durability: 200 mating cycles

PACKAGING

- Antistatic tubes or Tape and Reel / Pick-up Caps. Packaging options vary by part number. Consult print on website and verify with FCI

TECHNICAL DOCUMENTS

- Product Specification: BUS-12-087
- Application Specification: BUS-20-052
- Application Drawing: TA-901

ADDITIONAL INFORMATION

- For updates and details, see prints and specifications at www.fciconnect.com

Additional information can be found at www.fciconnect.com/ribcage