




Heyco-Flex™ III Liquid Tight Tubing

Flexible, Nonmetallic Liquid Tight Electrical Tubing

- For use with Heyco-Flex III Fittings. See page ____.
- Resists corrosion, oil, and water.
- Maximum flexibility can be used in extremely tight quarters.
- Easy, permanent assembly between the tubing and fittings: push the tubing over the fitting ferrule until the tubing “clicks” into place.
- No threading of the tubing required to install. This eliminates the possibility of cutting the tubing and creating leak paths.
- Flame retardant, won’t burn.
- Nontoxic and UV resistant.
- For use in both wet and dry applications.
- Rated for Type 3R applications.
- Lightweight and lower installed cost.
- Quick and easy installation.
- Suitable for use in high vibration or flexing applications (automotive equipment, fiber optics, computer and peripherals, lab equipment, robotics, etc.).
- Maximum flexibility, can be used in extremely tight quarters. Bend radius of Heyco-Flex III is equal to its outside diameter.
- Mounting brackets are available, see page 1-13.
- **Order Part No. 8340**, VF-28 Cutting Tool, for cutting Heyco-Flex Tubing cleanly and evenly. See Page 1-1.

TRADE SIZE	PART NO.	DESCRIPTION	PART DIMENSIONS				STANDARD COIL LENGTH ft/coil
			A Outside Diameter		B Inside Diameter		
			in.	mm.	in.	mm.	
1/2	8479	HF3 1/2 FR	0.850	21,6	0.651	16,5	100
3/4	8480	HF3 3/4 FR	1.116	28,3	0.865	22,0	100

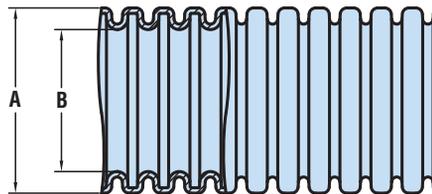

Quick Specs

Material	Halogen Free Nylon 6
Certifications	Recognized under Underwriters Laboratories File #121095
	Certified to both Canadian and U.S. Requirements
Flammability Rating	94V-0