


## Introducing the QM— Vibration Mounts

### Features and Benefits

- Provide vibration dampening and shock control for electronic components
- Help ensure that the item to which they are mounted remains stable
- Reduction of structure-born noise
- Sturdy, reliable construction
- Three different styles available
- Easily mounted with studs and nuts

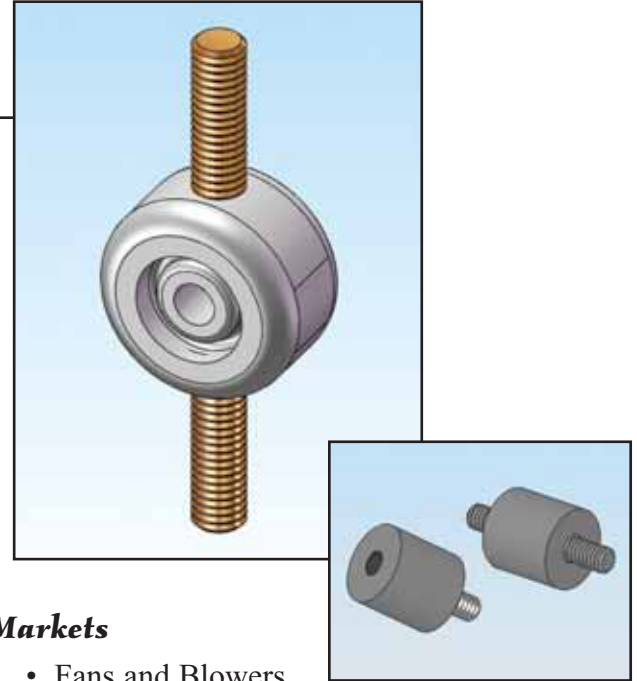


### Markets

- Fans and Blowers
- HVAC Equipment
- Electronic Equipment
- Relays and Control Panels
- Pumps and Compressors
- Machinery

QM		Standard Pack: 100 per bag				
Mat'l: Neoprene Rubber 40 Durometer, RMS-241 Color: Black; Insert/Studs: 1010-1020 Steel, RMS-242; Plating: Yellow chromate over Zinc Plate, RMS-274. *QM8 only: IIR, Shore 55A Durometer, RMS 360 Color: Black; Stud: Brass, RMS-349	"A" ± .020	"B" ± .020	Stud Thread "S"	Insert Thread "I"	Fig. No.	Ref Load at 15% Deflection Lbs (Kg)
QM1	7/16 (11.1)	7/16 (11.1)	#6-32 x 1/4	--	1	8 (4)
QM1T			#6-32 x 3/16	2	5 (2)	
QM2			--	1	6 (3)	
QM2T	1/2 (12.7)	9/16 (14.3)	#6-32 x 1/2	#6-32 x 3/16	2	7 (3)
QM3			--	1	9 (4)	
QM3T	3/4 (19.1)	1.0 (25.4)	#8-32 x 3/8	#8-32 x 3/16	2	8 (4)
QM4			--	1	15 (7)	
QM4T	9/16 (14.3)	1 - 1/4 (31.8)	#8-32 x 3/16	#8-32 x 3/16	2	28 (13)
QM5			--	1	43 (20)	
QM5T	1/2 (12.7)	10-32 x 3/8	#1/4-20 x 1/2	#1/4-20 x 3/8	2	34 (15)
QM6			--	1	57 (26)	
QM6T	9/16 (14.3)	1/2 (12.7)	#5/16-18 x 9/16	#5/16-18 x 3/8	2	26 (12)
QM7			--	1	3 (1)	
QM7T	See Drawing for Dimensions - *Designed in Metric		#10-32 x 3/8	#10-32 x 3/16	2	10 (5)
*QM8			3	12 (5)		

Threaded metal insert may be blind clip, or through-nut.

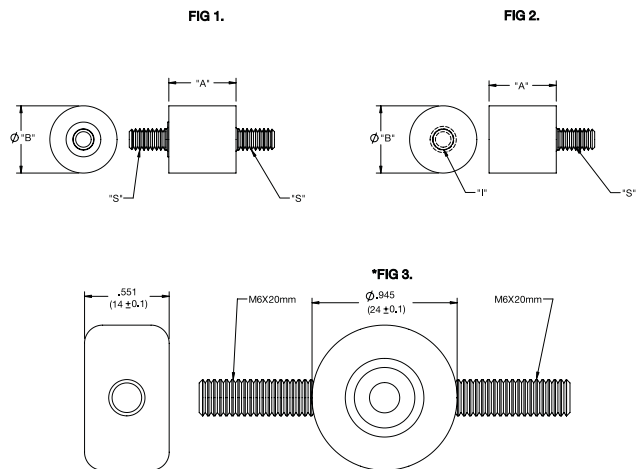

### Other Related Richco Product Solutions

