

Introducing the **WIT-50RLA-X**— Arrowhead Mount Cable Ties

Features and Benefits

- Snaps into a pre-drilled hole for quick mounting
- Bundling of cables can be done before or after mounting
- Arrowhead mount rotates in the hole to self-align the wire bundle
- One-piece mount & harness saves time and cost
- Available in 4 different lengths
- 50 lb tensile strength

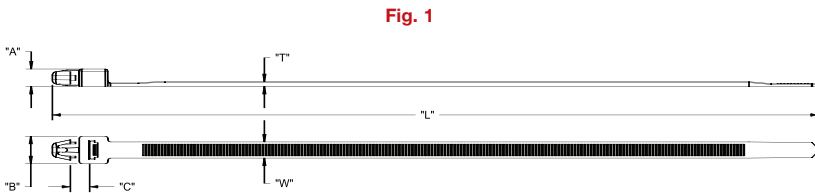
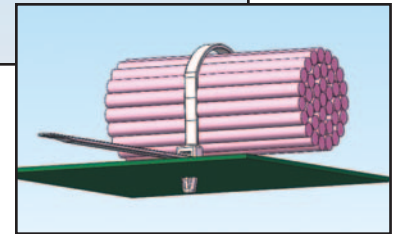
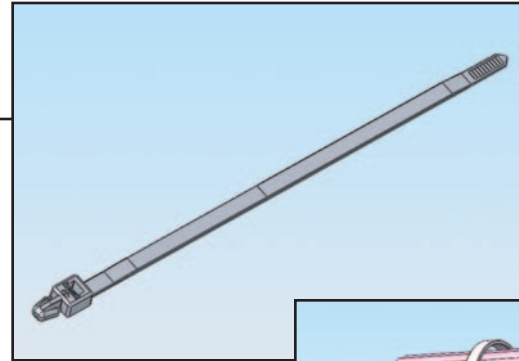


Fig. 1


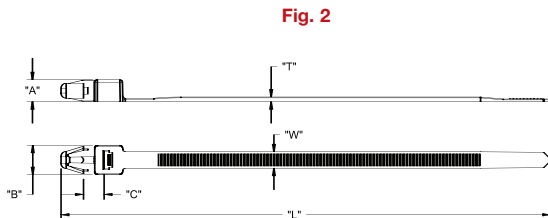


Fig. 2


Markets

- White Goods
- Telecommunications
- Security
- Gaming Machines

Other Related Richco Product Solutions



RSC




WITS



TOAH



TOBS



WIT



FTH-3

Standard Mat'l: Nylon 6/6, RMS-01 Color: Natural	Min. Loop Tensile Strength lb (kg)	"L" Length Ref.	Max. Bundle Diameter	"W" Width Ref.	"T" Thickness Ref.	"A"	"B" Ref.	"C" Ref.	Hole Dia.	Panel Thickness	Mat'l Variation	Fig.	
											UVB Nylon 6/6, RMS-46 Color: Black		
Standard Pack: 1,000 per bag													
WIT-50RLA	50 (22)	8.87 (225.4)	2.00 (50.8)	.19 (4.8)	.05 (1.3)	.20 (5.1)	.32 (8.1)	.21 (5.4)	.187 ± .003 (4.8 ± 0.08)	.093 (2.36)	-UVB	1	
WIT-50RLA-1		5.32 (135)	1.00 (25.4)			.26 (6.5)		.24 (6)				.250 ± .003 (6.35 ± 0.08)	Special
WIT-50RLA-2		6.69 (170)	1.50 (38.1)										
WIT-50RLA-3		7.87 (200)	1.75 (44.5)										